



# CATÁLOGO EQUIPAMIENTO RFID 2019

¿Qué aplicación necesitas para tu Proyecto RFID?

[www.century-latam.com](http://www.century-latam.com)



## HandHeld / ALR-H460 y ALR-H480



FRECUENCIA	902-928 MHZ
POWER	EIRP 3.3W - (+5dBm TO +30dBm)
FUNCTIONS	ANDROID 6.0 OS SUPPORTS WI-FI, BLUETOOTH AND 4G CELLULAR CONNECTIVITY BUILT-IN 8,000 MAH LI-PO RECHARGEABLE BATTERY 13 MP AUTO-FOCUS CAMERA WITH FLASH

## HandHeld / 0100

WORKING FREQUENCY	865-868MHZ / 920-925MHZ / 902-928MHZ
POWER	1W (30dBm, +5dBm TO +30dBm ADJUSTABLE)
READ RATE	> 200 TAGS/SECOND
FUNCTIONS	ANDROID 8.1 - BARCODE READING - BLUETOOTH - WIFI - CAMERA



## Reader / ARL-F800 y ARL-800-X



WORKING FREQUENCY	865 - 928 MHZ
OPERATING SYSTEM	LINUX WITH EMISSARY
GPIOs	4 IN / 8 OUT (OPTICALLY ISOLATED / OPEN COLLECTOR)
APPLICATION	WAREHOUSE RETAIL TRUCKS SUPPLY CHAIN MANAGEMENT

## Antena / ARL- 8698, ARL - A0501 y ARL-A1001

WORKING FREQUENCY	865 - 928 MHZ
POWER	6dBIC / 8.5dBIC / NOMINALLY 10.5dBIC, 11dBIC FCC / 10dBIC ETSI
DIMENSION	10.16" X 10.16" X 1.42"
IP RATING	IP67
CABLE/CONNECTOR	INSET RTNC MALE CONNECTOR



## Overhead fixed reader / CED114



WORKING FREQUENCY	920~925MHZ
DIMENSION	ANTENA: 470*190*35MM - HOST: 170*140*35MM
POWER	2W
WEIGHT	1.75 KG/PC, HOST WEIGHT 1KG
FUNCTIONS	HIDDEN AND OVERHEAD INSTALLATION SOUND ALARM, STABLE PERFORMANCE RECOMMENDED INSTALLATION HEIGHT ≤4M



## Pad / CER027



WORKING FREQUENCY	865~925MHZ
DIMENSION	250*176*16MM
POWER	15dBm ~ 25dBm
READ RATE	20PCS/SECOND
CASING	ABS
WEIGHT	400G
FUNCTIONS	RFID TAG READING/BONDING

## Pad / CER029

WORKING FREQUENCY	865~925MHZ
DIMENSION	385*270*20MM
POWER	15dBm ~ 25dBm
READ RATE	50PCS/SECOND
CASING	ABS + TEMPERED GLASS
WEIGHT	3.2KG
FUNCTIONS	RFID TAG READING/BONDING



## Pad para Joyería / CER026



WORKING FREQUENCY	865~925MHZ
DIMENSION	350MM*260MM*33MM
DISPLAY	4.3" x 6.6"
FUNCTIONS	Permite un mayor control de la información sobre visualización y gestión de ventas. Posee Adroid SO

## Self Checkout / CER900

WORKING FREQUENCY	865~925MHZ
DIMENSION	600MM*540MM*1254MM
POWER	15dBm ~ 25dBm
FUNCTIONS	20 + PCS GOODS READING INTEGRATED WITH RFID READ, GOODS DISPLAY & CASH OUT



## Detacher / CER002



WORKING FREQUENCY	865~925MHZ
FEATURES	MAGNETIC
CGS	9000 GAUSS
APPLICATION	RETAILERS

## Detacher / CER036

WORKING FREQUENCY	865~925MHZ
DIMENSION	DETACHER: 140 × 94 MM / AUTOTAG: 54 × 19 MM
MATERIALS	DETACHER: ABS AND METAL / AUTOTAG: ABS
FEATURES	ELECTRICAL SUPPLY
APPLICATION	RETAILERS



## Antena AM / CA78 - RFID



WORKING FREQUENCY	865~925MHZ
AM FREQUENCY	58MHZ
DIMENSION	1600*500*132MM
POWER	2W
FUNCTIONS	INTEGRATED DESIGN
	MASTER ANTENNA CAN WORK INDEPENDENTLY
	SOUND LIGHT ALARM - STABLE PERFORMANCE

## Magic Mirror / CER800

WORKING FREQUENCY	902.0MHZ-928.0MHZ
DIMENSION	708 MM X 1408 MM X 100 MM
WEIGHT	35KG
FUNCTIONS	Pantalla táctil integrada con un espejo o para mejorar la experiencia de compra de los clientes o de las tiendas o bibliotecas.





## Impresora de Escritorio/ G3000g - G2000g



RFID	INTEGRATED UHF READER/ENCODER (EPC CLASS 1 GEN2/ISO 18000-6C)
POWER RATING	100-240V, 50/60HZ, 4.0A
DIMENSION	W 10.07" (256 MM) X D 12.95" (329 MM) X H 7.8" (200 MM)
WEIGHT	3.5 KGS
PRINTING RESOLUTION	200dpi - 300dpi - 600 dpi
INTERFACES	RS-232 SERIAL , 10/100 M-BIT ETHERNET USB DEVICE 2.0 , USB HOST , CENTRONICS PARALLEL (OPTIONAL)

## Impresora Industrial / TX3r, TX3rmt, TX6rmt y TX2rmt

RFID	INTEGRATED UHF READER/ENCODER, EPC GEN 2 CLASS 1/ ISO 18000-6C
POWER RATING	110/220 VAC ±10%, 50/60 HZ
DIMENSION	W 11.3" (286 MM) X D 17.6" (448 MM) X H 11.0" (280 MM)
WEIGHT	15 KGS
PRINTING RESOLUTION	200dpi - 300dpi - 600 dpi
INTERFACES	RS-232 SERIAL , 10/100 M-BIT ETHERNET USB DEVICE 2.0 , USB HOST , CENTRONICS PARALLEL



## Binding Machine / CER033



WORKING FREQUENCY	865-925MHZ
DIMENSION	253*165*177MM
POWER	15dBm ~ 25dBm
CASING	ABS
WEIGHT	600 G
FUNCTIONS	RFID READER+BARCODE READER+LCD DISPLAY INSTANT BONDING OF SKU BARCODE AND EPC

## Túnel RFID / CER801

WORKING FREQUENCY	865-928 MHZ
DIMENSION	2100*1500*1600* MM
STRUCTURE	MODULAR
TRAITS	Operaciones de identificación son inmediatas y precisas y no requieren ninguna interacción del usuario. El Portal lee a través de cualquier tipo de embalaje no metálico.



## Túnel RFID / CER802



WORKING FREQUENCY	865-928 MHZ
DIMENSION	750*750*1500*
STRUCTURE	MODULAR
TRAITS	Las operaciones de identificación son inmediatas y no requieren ninguna interacción del usuario. El túnel detecta a través de cualquier tipo de embalaje no metálico y se adapta para controlar tanto la entrada como la salida de mercancías del almacén.



## Century Cloud

Software de gestión para sistema de monitoreo de procesos de Inventario, movimiento y despacho de mercadería, activos fijos y otras aplicaciones; dirigido a retailers, supermercados y otras industrias.

### Century Cloud tiene por módulos de gestión las opciones:


- Módulo de Inventario
- Módulo de Movimientos
- Módulo de Ingresos
- Módulo de Despacho
- Módulo de Ventas
- Módulo de Control de Perdidas
- DASHBOARD
- Administración





# Equipamiento RFID – ETIQUETAS

Contamos con gran variedad de etiquetas Duras y blandas para la protección de todo tipo de mercadería y activos fijos. Resistentes al agua, calor y presión.





## TIENDAS DE ROPA

## RETAIL

## ACTIVOS FIJOS

## LAVANDERÍA

## VEHÍCULOS

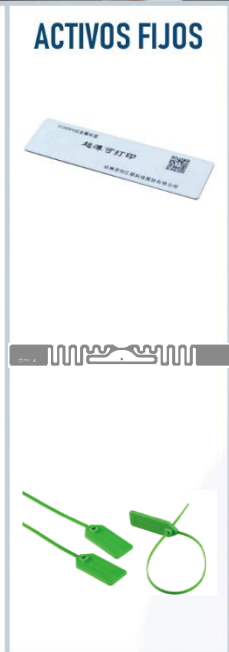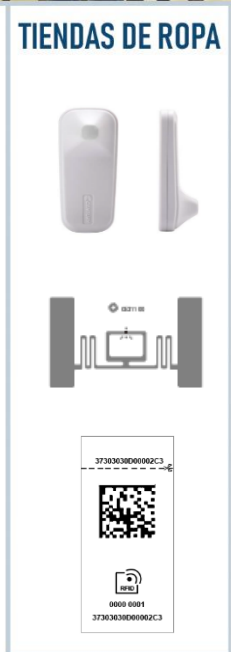

## MAPA DE ETIQUETAS



